



2241 221st Ave. NE. East Bethel, MN 55011
Phone: (763) 367-7844 • Fax: (763) 434-9578

FUEL TANK PERMIT APPLICATION

JOB ADDRESS: _____

Owner's Name: _____ Phone: _____

Email: _____

General Contractor: _____ Phone: _____

E-mail: _____ Contractors Lic. #: _____

Contractor's lead certification number for pre 1978 structures: _____

Number of Tanks: _____ Size of tank(s): _____

Contents of tank(s): _____

Above or Below Ground: _____

Tank use: Temporary Permanent Bulk Storage Dispensing

Tank Manufacturer: _____

Location on property: _____

Valuation of Work* \$ _____

*Based on cost of material and labor as if you were to hire a contractor

SEPARATE PERMITS ARE REQUIRED FOR ELECTRICAL, PLUMBING, HEATING AND A/C, FIREPLACE, AND FIRE SPRINKLERS. THIS PERMIT BECOMES NULL AND VOID IF WORK OR CONSTRUCTION AUTHORIZED IS NOT COMMENCED WITHIN 180 DAYS, OR IF CONSTRUCTION OR WORK IS SUSPENDED OR ABANDONED FOR A PERIOD OF 180 DAYS AT ANY TIME AFTER WORK IS COMMENCED.

I HEREBY CERTIFY THAT I HAVE READ AND EXAMINED THIS APPLICATION AND KNOW THE SAME TO BE TRUE AND CORRECT. ALL PROVISIONS OF LAWS AND ORDINANCES GOVERNING THIS TYPE OF WORK WILL BE COMPLIED WITH WHETHER SPECIFIED HERIN OR NOT. THE GRANTING OF A PERMIT DOES NOT PRESUME TO GIVE AUTHORITY TO VIOLATE OR CANCEL THE PROVISIONS OF ANY OTHER STATE OR LOCAL LAW REGULATING CONSTRUCTION OR THE PERFORMANCE OF CONSTRUCTION.

TOTAL AMOUNT DUE \$ _____

Signature of Contractor or Authorized Agent: _____ Date: _____

Building Approval: _____ Date: _____

Fire Chief Approval: _____ Date: _____

Zoning Setbacks

Zoning	Front Yard Setback on City Road	Side Yard Setback	Side Yard Setback on a City Road	Rear Yard Setback	Setback from County Road	2nd Driveway Allowed	Primary Structure Setbacks	Septic setbacks	Well setbacks	Wetland Setbacks
R1*	30 ft	10 ft	25 ft	10 ft	100 ft	No	10 ft	Bldg must be 20 ft from drainfield and 10 ft from tanks Septics can be 10ft from a property line	3 ft from any bldg overhang	See Wetland or Shoreland Ord.
R2*	30 ft	10 ft	25 ft	10 ft		No	10 ft			
RR*	40 ft	25 ft	40 ft	25 ft		With permit	25 ft			
Whispering Aspen	28 ft	10 ft	25 ft	10 ft	NA	No	10 ft			
Viking Preserve	25 ft	7 ft	25 ft	25 ft	50 ft	No	10 ft			25 ft

*Check to see if you are in the Shoreland Overlay District as the setbacks may be different.

Shoreland Overlay Please check with staff for your setbacks as they will be different than above. 25% Impervious Surface rule applies, meaning only 25% of the property's surface can have an impervious surface where water cannot drain through it. To find out your zoning or if you are in the Shoreland Overlay District: either use the GIS map on the city website or call 763-367-7844 between M-F 8am-4pm.


Wetland Setbacks

Water Body Type	Permanent Buffer Average Width	Minimum Building and septic system setback from delineated wetland edge
Wetlands adjacent to Significant Natural Environmental Areas (SNEA) or *highly susceptible wetlands	25 ft	50 ft
Cedar Creek or wetlands adjacent to	25 ft	Structures: 100 ft Septic systems: 75 ft
All other remaining wetlands including *slightly and moderately susceptible wetlands	15 ft	25 ft
Storm water ponds and *least susceptible wetlands	Top of slope	25 ft
Lakes	15 ft	Refer to Shoreland Overlay District ord.

*Wetland susceptibility as defined in city's water management plan

Shoreland Setbacks

Classes of Public Waters	Structures in Sewered Districts	Structures in Unsewered Districts	Sewage Treatment Systems
Lake – Natural Environment <i>Anderson Lake, Booster Pond, Cooper's Lake, Deer Lake, Devil Lake, Fish Lake, Goose Lake, Lone Pine Lake, Mud Lake, Ned's Lake, Rice Lake</i>	150 ft	150 ft	150 ft
Lake – Recreational Dvlp <i>Minard Lake</i>	75 ft	100 ft	75 ft
Lake – General Dvlp <i>Coon Lake</i>	50 ft	75 ft	50 ft
Creeks and Streams	100 ft	100 ft	75 ft

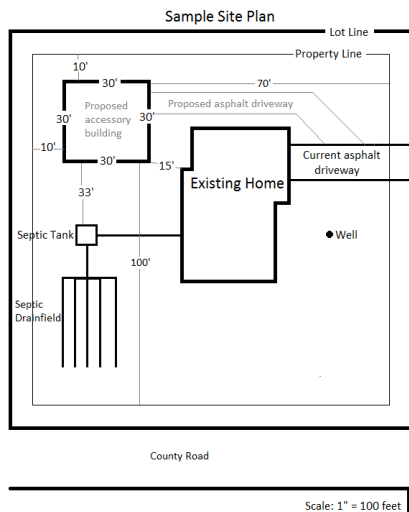

Required to be on site plan:

1. Septic system location and distances
2. Well location and distances
3. Property line location and distances
4. Wetland location and distances
5. Drainage Easements locations
6. Other structures locations and distances
7. Proposed structure location and size/measurements

Additional site plan material required for Shoreland Overlay District:

8. The Ordinary High Water (OHW) level must be provided
9. The Impervious Surface Calculations must be provided
10. A Certificate of Survey may be required



East Bethel Community Development

2241 221st Ave NE | East Bethel, MN 55011
Phone: (763) 367-7844 | Fax: (763) 434-9578

SOIL EROSION POLICIES:


Silt Fence Requirements:

The required areas of silt fencing will be indicated on the Certificate of Survey that is returned to the general contractor with the New Home Permit packet.

Silt fencing must be maintained throughout construction and any sagging or tears must be repaired.

Silt fencing is required around

- dirt driveways
- disturbed earth (20 ft from a newly dug foundation)
- front lot lines
- Side and rear lot lines if there is a house or property owned by a different property owner
- between lower elevations on a lot such as drainage ditches
- culverts
- sidewalks

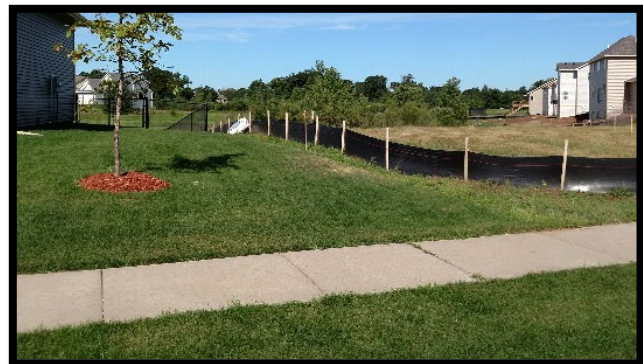

Soil taken out of the ground and placed on the lot (or adjacent lots) must be trucked off site.

Wetlands or wet areas:

Silt fencing is required 20 feet from wet areas.

Driveways:

Aggregate ½ inch to 3 inches in diameter must be placed between a dirt driveway and an improved road before construction begins. This area should be maintained until a bituminous surfaced driveway is installed. If dirt is brought onto the improved road than it must be cleaned off that same day.



The driveway must be bituminous if it connects to an improved road, but if that work will be completed after the Certificate of Occupancy (CO) is issued than escrow can be placed in order to gain a Temp CO. In order to issue Temp CO with driveway escrow than aggregate ½ inch to 3 inches in diameter is required around culverts and the driveway entry.



Storm Drains Located in Curbs / Culverts:

Silt fence should be placed over storm drains located in the curbs. If culverts are required additional erosion techniques are needed so the stones in the driveway do not wash over the culvert.

Silt fence vs. logs:

Traditional silt fencing is what is generally approved.

If you wish to use logs, than you must get prior approval from the Community Development Department first.

Sidewalks:

Silt fence is required between the lot line and all sidewalks. If the sidewalk around the property is damaged, the contractor is to take pictures and discuss this with the building inspector before work begins. Otherwise, the contractor will be required to repair the damaged sidewalk before a CO will be issued. If any dirt goes onto the sidewalk, it must be cleaned up that same day.

